Eco Soirée® One-Piece Toilet, 1.28GPF

FEATURES

- Double Cyclone® flushing system, low consumption (1.28GPF/4.8LPF)
- Optional SanaGloss® ceramic glaze SanaGloss glaze prevents debris, and mold from sticking to ceramic surfaces, leading to fewer chemicals and less water in cleaning.
- Universal Height
- Decorative one-piece with skirted design and highprofile tank
- Elongated front bowl with SoftClose® seat (SS214)
 Seat and lid gently close with the touch of a hand
- Chrome trip lever

MODELS

- MS964214CEFG
 With SanaGloss ceramic glaze
- MS964214CEF Less SanaGloss, SS224 SoftClose seat included
- TSU03W.10 10" Unifit rough-in (sold separately)
- TSU03W.14 14" Unifit rough-in (sold separately)

COLORS/FINISHES

Standard

#01 Cotton

#03 Bone

#11 Colonial White

#12 Sedona Beige

#51 Ebony (not available in SanaGloss)

PRODUCT SPECIFICATION

The one-piece low consumption Double Cyclone flushing system toilet shall be 1.28GPF/4.8LPF. Toilet shall have optional SanaGloss ceramic glaze and be at Universal Height. Toilet shall be of skirted design with high-profile tank, elongated front bowl with SoftClose seat and Chrome trip lever. Toilet shall be TOTO Model MS964214CEF_____.



SanaGloss

CACLONE

CODES/STANDARDS

- Meets and exceeds ASME A112.19.2/CSA B45.1
- Certifications: IAPMO(cUPC), EPA Watersense, State of Massachusetts, City of Los Angeles, and others
- Code compliance: UPC, IPC, NSPC, NPC Canada, and others
- Legislative Compliance: California AB715, California Green Building Code, City of Los Angeles Water Efficiency Ordinance
- ADA compliant (when installed with trip lever located on the approach side)







Eco Soirée® One-Piece Toilet, 1.28GPF

SPECIFICATIONS

1.28 GPF/4.8LPF Water Use Flush System Double Cyclone Min. Water Pressure 8 psi (static) Water Surface 7-7/8" x 9-13/16"

Trap Diameter 2-1/8"

Rough-in 12" (Standard), 10", 14"

Trap Seal 2-3/16"

Warranty One Year Limited Warranty

Material Vitreous china

Shipping Weight 120 lbs.


32"L \times 20"W \times 17-3/4" H1 \times Shipping Dimensions


28-3/4" H2

INSTALLATION NOTES

Back-to-Back Toilet Installations:

TOTO recommends the use of a nationally listed, double sanitary tee-wye only, in vertical waste stacks, in accordance with the stipulations noted in the majority of nationally recognized plumbing codes.

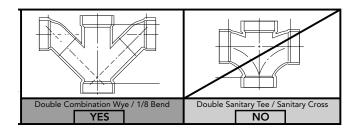

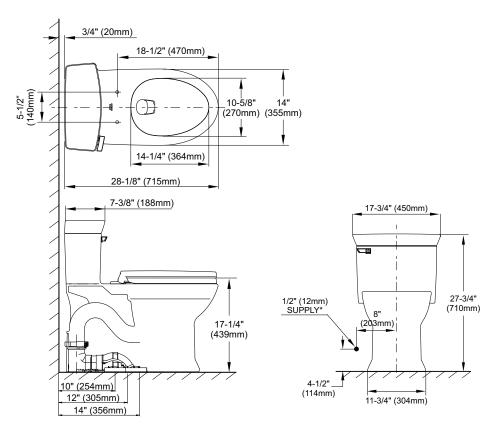



These dimensions and specifications are subject to change without notice